

螺旋挡圈




www.bolispring.com
bolispring@aliyun.com
+86-577-62799797

SD

SERIES

中负荷
Medium Duty

轴用
External

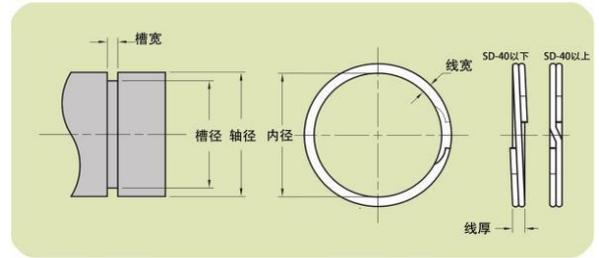

型号	轴径	环 (IN)			槽 (IN)		强度 (KN) ³
		内径	线宽	线厚	槽径	槽厚	
SD-50	0.500	0.467	0.045	0.025	0.474	0.030	2000
SD-53	0.531	0.498	0.045	0.025	0.505	±0.020 0.030	2130
SD-55	0.551	0.518	0.045	0.025	0.525	0.030	2210
SD-56	0.562	0.529	0.045	0.025	0.536	0.030	2250
SD-59	0.594	0.561	0.045	0.025	0.569	0.030	2380
SD-62	0.625	0.585	0.055	0.025	0.594	0.030	2500
SD-65	0.656	0.617	0.055	0.025	0.625	0.030	2630
SD-66	0.669	0.629	0.055	0.025	0.638	0.030	2680
SD-68	0.687	0.647	0.055	0.025	0.656	0.030	2750
SD-71	0.718	0.679	0.055	0.025	0.687	0.030	2880
SD-75	0.750	0.710	±0.013 0.065	0.031	0.719	0.036	3360
SD-78	0.781	0.741	0.065	0.031	0.750	0.036	3500
SD-81	0.812	0.771	0.065	0.031	0.781	±0.003 0.036	±0.003/-0 3640
SD-84	0.843	0.803	0.065	0.031	0.812	0.036	3780
SD-87	0.875	0.828	0.065	0.031	0.838	0.036	3920
SD-90	0.906	0.860	0.065	0.031	0.869	0.036	4060
SD-93	0.937	0.889	0.065	0.031	0.900	0.036	4200
SD-96	0.968	0.916	0.075	0.037	0.925	0.042	5180
SD-98	0.984	0.930	0.075	0.037	±0.002 0.941	0.042	5260
SD-100	1.000	0.946	0.075	0.037	0.957	0.042	5350
SD-102	1.023	0.968	0.075	0.037	0.980	0.042	5470
SD-103	1.031	0.978	0.075	0.037	0.988	0.042	5310
SD-106	1.062	1.007	0.075	0.037	1.020	0.042	5680
SD-109	1.093	1.040	0.075	0.037	1.051	0.042	5840
SD-112	1.125	1.070	0.075	±0.004 0.037	1.083	0.042	6020
SD-115	1.156	1.102	0.075	0.037	1.114	0.042	6180
SD-118	1.188	1.127	0.085	0.043	1.140	0.048	7380
SD-121	1.218	1.159	0.085	0.043	1.170	0.048	7570
SD-125	1.250	1.188	0.085	0.043	1.202	0.048	7770
SD-128	1.281	1.221	±0.015 0.085	0.043	1.233	±0.004 0.048	7960
SD-131	1.312	1.251	0.095	0.043	1.264	0.048	8150
SD-134	1.343	1.282	0.095	0.043	1.295	0.048	8350
SD-137	1.375	1.308	0.095	0.043	1.323	0.048	8540
SD-140	1.406	1.340	0.095	0.043	1.354	0.048	8740
SD-143	1.437	1.370	0.095	0.043	1.385	0.048	8390
SD-146	1.468	1.402	0.095	0.043	1.416	0.048	9120
SD-150	1.500	1.433	0.095	0.043	1.448	0.048	9320
SD-156	1.562	1.490	0.108	0.049	1.507	0.056	±0.004/-0 10100
SD-157	1.575	1.503	0.108	0.049	1.520	0.056	10510
SD-162	1.625	1.549	0.108	0.049	1.566	0.056	10910
SD-168	1.687	1.610	0.118	0.049	1.628	0.056	11310
SD-175	1.750	1.673	0.118	0.049	1.691	±0.005 0.056	11450
SD-177	1.771	1.690	±0.020 0.118	0.049	±0.003 1.708	0.056	11720
SD-181	1.813	1.730	0.118	0.049	1.749	0.056	12120
SD-187	1.875	1.789	0.128	0.049	1.808	0.056	12530
SD-193	1.938	1.851	0.128	0.049	1.871	0.056	12730
SD-196	1.969	1.882	0.128	0.049	1.902	0.056	12930
SD-200	2.000	1.909	0.128	0.049	1.929	±0.006 0.056	13350
SD-206	2.062	1.971	0.128	0.049	1.992	0.056	13740




SD

SERIES

中负荷
Medium Duty

轴用
External

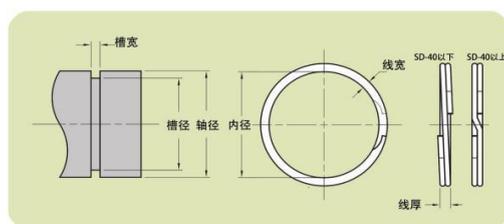

型号	轴径	环 (IN)					槽 (IN)		强度 (KN) ³		
		内径		线宽	线厚	槽径	槽厚				
SD-212	2.125	2.029	+0/-0.020	0.128		0.049		2.051	0.056	14000	
SD-215	2.156	2.060		0.138		0.049		2.082	0.056	14150	
SD-216	2.165	2.070		0.138		0.049		2.091	0.056	14550	
SD-218	2.188	2.092		0.138		0.049		2.113	0.056	14950	
SD-225	2.250	2.153		0.138		0.049		2.176	0.056	15270	
SD-231	2.312	2.211		0.138		0.049		2.234	0.056	15360	
SD-236	2.362	2.261		0.138		0.049		2.284	0.056	15760	
SD-237	2.375	2.273	+0/-0.025	0.148	±0.004	0.049		2.297	0.056	16160	
SD-243	2.437	2.331		0.148		0.049		2.353	0.056	16550	
SD-250	2.500	2.394		0.148		0.049		2.418	0.056	16560	
SD-255	2.559	2.449		0.148		0.049		2.475	0.056	16970	
SD-256	2.562	2.452		0.148		0.049		2.476	0.056	17380	
SD-262	2.625	2.514		0.148		0.049		2.539	0.056	17780	
SD-268	2.688	2.572		0.158		0.049		2.597	0.056	18190	
SD-275	2.750	2.635		0.158		0.049		2.660	0.056	18590	
SD-281	2.813	2.696		0.168		0.049		2.722	0.056	18990	
SD-287	2.875	2.755		0.168		0.049		2.748	0.056	19090	
SD-293	2.937	2.817		0.168		0.049		2.843	0.056	24510	
SD-295	2.952	2.831		0.168		0.061		2.858	0.068	24650	
SD-300	3.000	2.877		0.168		0.061		2.904	0.068	25150	
SD-306	3.062	2.938		0.178		0.061		2.966	0.068	25350	
SD-312	3.125	3.000	+0/-0.030	0.178		0.061		3.027	0.068	25650	
SD-314	3.149	3.023		0.178		0.061		3.051	0.068	26160	
SD-318	3.187	3.061		0.178		0.061		3.089	0.068	26660	
SD-325	3.250	3.121		0.188		0.061		3.150	0.068	26910	
SD-331	3.312	3.180		0.188		0.061	±0.003	3.208	±0.006	0.068	27170
SD-334	3.343	3.210		0.188		0.061		3.239	0.068	27660	
SD-337	3.375	3.242		0.188		0.061		3.271	0.068	28170	
SD-343	3.437	3.301		0.188		0.061		3.331	0.068	28520	
SD-350	3.500	3.363		0.198		0.061		3.394	0.068	28670	
SD-354	3.545	3.402		0.198		0.061		3.433	0.068	29180	
SD-356	3.362	3.422		0.198		0.061		3.452	0.068	29680	
SD-362	3.625	3.483		0.198	±0.005	0.061		3.515	0.068	30100	
SD-368	3.687	3.543		0.198		0.061		3.575	0.068	30180	
SD-374	3.740	3.597		0.198		0.061		3.628	0.068	30380	
SD-375	3.750	3.606		0.198		0.061		3.638	0.068	30680	
SD-381	3.812	3.668		0.208		0.061		3.700	0.068	31190	
SD-387	3.875	3.724		0.208		0.061		3.757	0.068	31700	
SD-393	3.938	3.784		0.218		0.061		3.820	0.068	32200	
SD-400	4.000	3.842	+0/-0.040	0.218		0.061		3.876	0.068	32700	
SD-406	4.063	3.906		0.218		0.061		3.939	0.068	33200	
SD-412	4.125	3.967		0.218		0.061		4.000	0.068	33270	
SD-413	4.134	3.975		0.218		0.061		4.010	0.068	33710	
SD-418	4.188	4.022		0.228		0.061		4.058	0.068	34210	
SD-425	4.250	4.084		0.228		0.061		4.120	0.068	34710	
SD-431	4.312	4.147		0.228		0.061		4.182	0.068	34860	
SD-433	4.331	4.164		0.228		0.061		4.200	0.068	35210	
SD-437	4.375	4.208		0.228		0.061		4.245	0.068	36220	
SD-443	4.437	4.271		0.238		0.061		4.307	0.068	35710	
SD-450	4.500	4.326		0.250		0.061		4.364	0.079	36220	
SD-456	4.562	4.384		0.250		0.072	±0.004	4.422	0.079	43340	




SD

SERIES

中负荷
Medium Duty

轴用
External

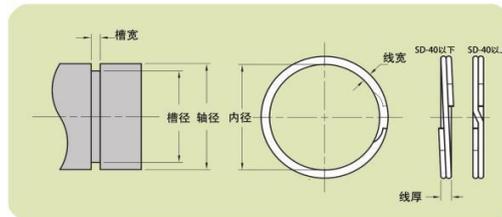

型号	轴径	环 (IN)			槽 (IN)		强度 (KN) ³	
		内径	线宽	线厚	槽径	槽厚		
SD-462	4.625	4.447	0.250	0.072	4.485	0.079	43940	
SD-468	4.687	4.508	0.250	0.072	4.547	0.079	44530	
SD-472	4.754	4.546	0.250	0.072	4.584	0.079	44880	
SD-475	4.750	4.571	0.250	0.072	4.610	0.079	45130	
SD-481	4.812	4.633	±0/-0.040	0.250	4.762	±0.006	45720	
SD-487	4.875	4.695	0.250	0.072	4.735	0.079	46310	
SD-493	4.937	4.757	0.250	0.072	4.797	0.079	46900	
SD-500	5.000	4.816	0.250	0.072	4.856	0.079	47500	
SD-511	5.118	4.934	0.250	±0.005	4.974	0.079	48600	
SD-512	5.125	4.939	0.250	0.072	4.981	0.079	48690	
SD-525	5.250	5.064	0.250	0.072	5.107	0.079	49880	
SD-537	5.375	5.187	0.250	0.072	5.228	0.079	51030	
SD-550	5.500	5.308	0.250	0.072	5.353	0.079	52250	
SD-551	5.511	5.320	0.250	0.072	5.364	0.079	52360	
SD-562	5.625	5.433	±0/-0.050	0.250	5.478	±0.007	53440	
SD-575	5.750	5.550	0.250	0.072	5.597	0.079	54630	
SD-587	5.875	5.674	0.250	0.072	5.722	0.079	55810	
SD-590	5.905	5.705	0.250	0.072	5.752	0.079	56100	
SD-600	6.000	5.798	0.312	0.086	5.847	0.094	57000	
SD-612	6.125	5.903	0.312	0.086	5.953	0.094	69500	
SD-625	6.250	6.026	0.312	0.086	6.078	0.094	70920	
SD-629	6.299	6.076	0.312	0.086	6.127	0.094	71480	
SD-637	6.375	6.152	0.312	0.086	6.203	0.094	72340	
SD-650	6.500	6.274	0.312	0.086	±0.004	6.328	0.094	73760
SD-662	6.625	6.390	0.312	0.086	6.443	0.094	75180	
SD-675	6.750	6.513	±0/-0.060	0.312	6.568	0.094	76600	
SD-687	6.875	6.638	0.312	0.086	6.693	0.094	78010	
SD-700	7.000	6.761	0.312	0.086	6.818	0.094	79430	
SD-712	7.125	6.877	0.312	0.086	6.933	0.094	80850	
SD-725	7.250	6.999	0.312	0.086	7.058	0.094	82270	
SD-737	7.375	7.125	0.312	0.086	7.183	0.094	83690	
SD-750	7.500	7.250	0.312	0.086	7.308	0.094	85110	
SD-762	7.625	7.363	0.312	±0.006	7.423	0.094	86520	
SD-775	7.750	7.486	0.312	0.086	7.548	±0.008	0.094	87940
SD-787	7.875	7.611	0.312	0.086	7.673	0.094	89360	
SD-800	8.000	7.734	0.312	0.086	7.798	0.094	90780	
SD-825	8.250	7.792	0.375	0.086	8.038	0.094	93620	
SD-850	8.500	8.220	0.375	0.086	8.288	0.094	96450	
SD-875	8.750	8.459	0.375	0.086	8.528	0.094	99290	
SD900	9.000	8.707	±0/-0.070	0.375	8.778	0.094	102130	
SD-925	9.250	8.945	0.375	0.086	9.018	0.094	104960	
SD-950	9.500	9.194	0.375	0.086	9.268	0.094	107800	
SD-975	9.750	9.432	0.375	0.086	9.508	0.094	110640	
SD-1000	10.000	9.680	0.375	0.086	9.758	0.094	113470	
SD-1025	10.250	9.918	0.375	0.086	9.998	0.094	116310	
SD-1050	10.500	10.166	0.375	0.086	10.248	0.094	119150	
SD-1075	10.750	10.405	0.375	0.086	10.488	0.094	121990	
SD-1100	11.000	10.653	0.375	0.086	10.738	0.094	124820	